


## 5mm Oval Led Blue Color

### Features:

- ◆ Standard T-1 diameter package
- ◆ General purpose leads
- ◆ Reliable and rugged

### Package Dimensions:

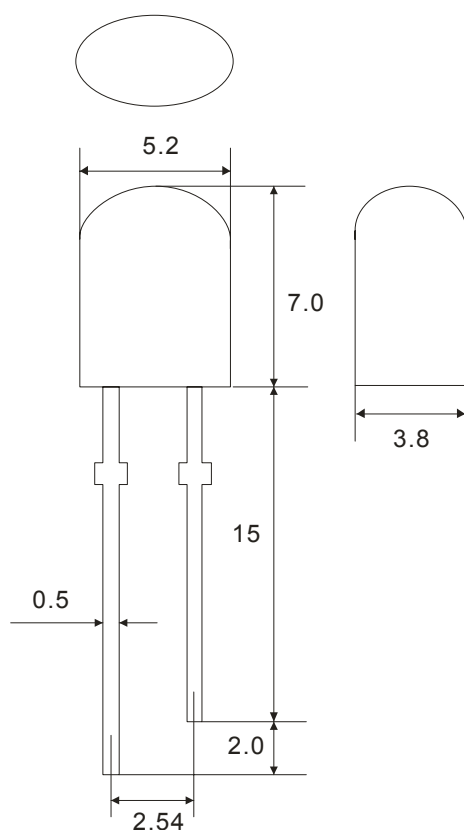

Part NO.	CHIP Material	Colloid Color	Colloid Material
	InGaAlP	Blue	Epoxy

### Notes:

- 1、 all dimensions in mm tolerance is  $\pm 0.2$ mm unless otherwise noted.
- 2、 an epoxy meniscus may extend about 1.5mm down the leads.
- 3、 burr around bottom of epoxy may be 0.5mm max.

### ■ Absolute Maximum Ratings (Ta = 25℃)

Parameter	Symbol	Absolute maximum Rating	Unit
Max Power Dissipation	$P_M$	80	mW
Max Continuous Forward Current	$I_{FM}$	20	mA
Max Reverse Voltage	$V_{RM}$	5	V
Peak Forward Current	$I_{FP}$	75	mA
Lead Soldering Temperature/Time	$T_{SOL}$	240/≤3S	℃/S
Operating Temperature Range	$T_{OPR}$	-25~+85	℃
Storage Temperature Range	$T_{STR}$	-30~+100	℃

### ■ Typical Electrical & Optical Characteristics(Ta=25° )

Parameter	Symbol	Min.	Typ.	Max.	Unit	Condition
Luminous Intensity	$I_v$	600	700	800	mcd	$I_F=20mA$
Viewing Angle	2Ø1/2	/	60	/	deg	$I_F=20mA$
Peak Wave Length	$\lambda_p$	/	460	/	nm	$I_F=20mA$
Dominant Wave Length	$\lambda_d$	460	/	470	nm	$I_F=20mA$
Spectral Width at half height	$\Delta\lambda$	/	30	/	nm	$I_F=20mA$
Forward Voltage	$V_F$	3.0	3.2	3.4	V	$I_F=20mA$
Reverse Current	$I_R$	/	/	≤30	μA	$V_R=5V$

#### Notes:

- 1、Through aging experiment certificate: This LED at normal work under condition: Then  $I_F=20\text{ mA}$ ,  $V_F=2.5\text{ V}$ , the service life is 3-100,000 hours.
- 2、Press anti-electrostatic weld an operation(connect a ground of line, wear static electricity wreath and wear a pure cotton finger set).
- 3、The LED product that our company provide can order to do according to customer's need, the related technique parameter will take place variety, the detailed circumstance please consult with a relevant personnel of my company.